



SVDV slurry injector

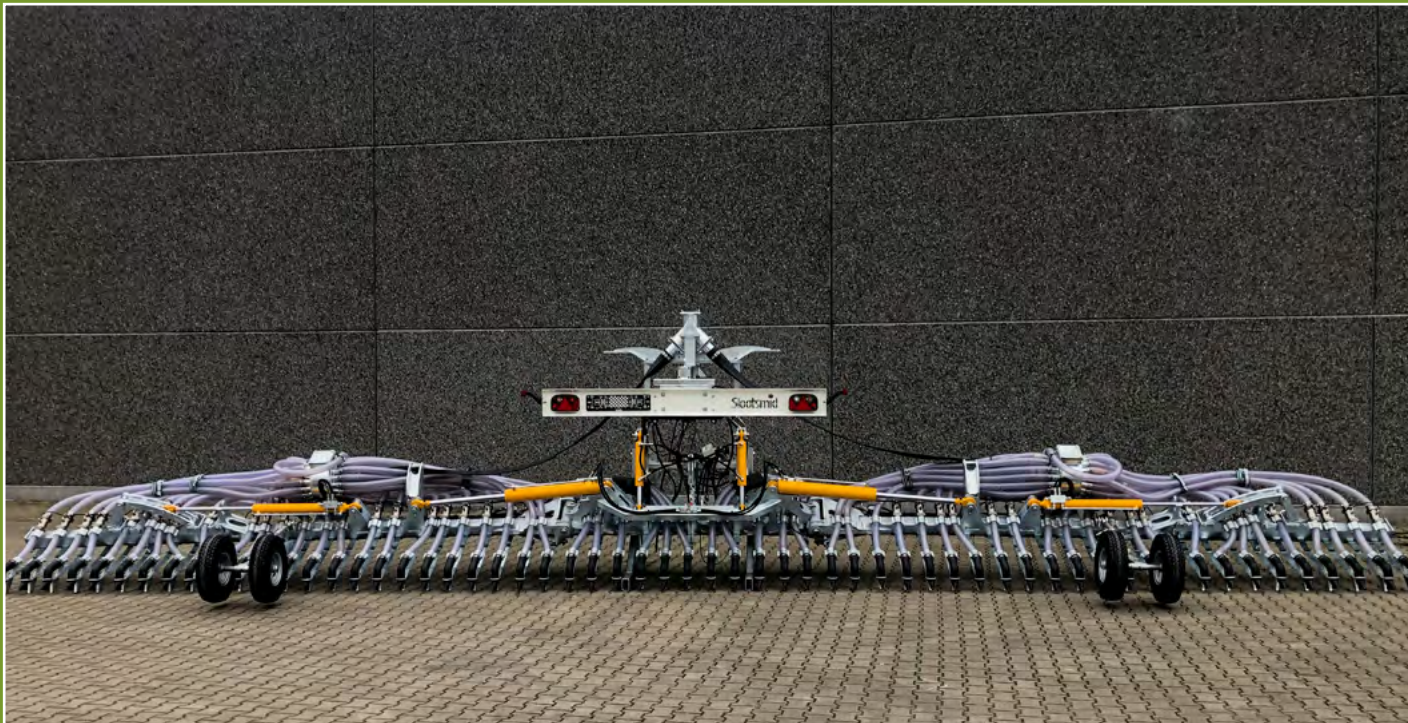

- Low maintenance
- Integrated lift system
- 2 Sootsmid vertical macerating distributors
- Suitable for trailing hose system

The SVDV coulter applicator has the same features as the SV applicator but has a more robust construction to accommodate the larger working width. The SVDV applicator is available with working widths from 12 to 15 metres. The slurry injector has few wear parts, giving it a long service life with low cost of ownership. The SVDV slurry injector has an integrated lift system, so it does not require a separate lift system and can be easily mounted behind almost any brand and type of tanker. The outer sections are hydraulically collapsible, reducing the machine width to less than 4 metres in transport position so it does not extend beyond the tank.

The SVDV coulter applicator has two vertical cutting distributors, resulting in perfect slurry distribution on the field, across the entire working width of the machine. The distributors are constructed to continuously maintain equal pressure at all outlets. Together with the unique continuous hoses with steel spiral and 50 millimetre inner diameter, this ensures perfect flow and prevents blockages.

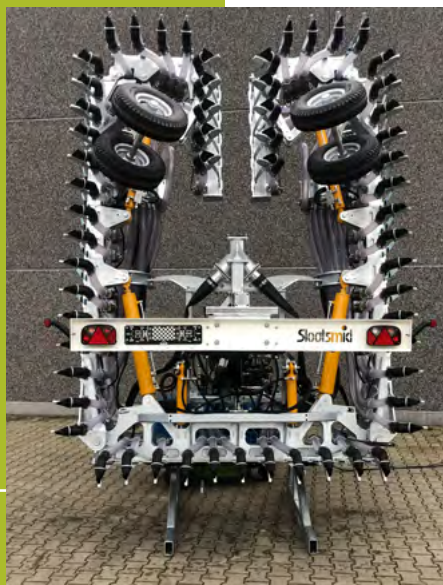

Technical specifications

Type	SVDV 1200	SVDV 1500
Working width	11.80 m	14.75 m
Number of elements	59	59
Element spacing	20 cm	25 cm
Transport width	2.85 m	2.85 m
Transport height	3.95 m	3.95 m
Weight	2,550 kg	2,590 kg



Element

- Wear-resistant trailing coulters
- Long spring leaves for good ground contour following
- Ground pressure is adjustable from 1 to 7 kilogram
- Ground clearance between 20 and 30 centimetres



Characteristics

- Frame and elements completely galvanised
- Flat mounting plates with hole pattern for various mounting options
- Unique distribution thanks to two vertical Slootsmid Mini Duo distributors
- Robust lighting bar and slow-moving vehicle triangle
- Set of double land wheels (2x)
- 6" KKV flat-face camlock coupling, on top of distributor
- Continuous hoses with steel spiral and 50 millimetres inner diameter, prevents blockages
- Also available with drag hose for trailing hose system
- Available with pneumatically operated section shut-offs as an option

