

SB Eco and SB Profi



- Suitable for all soil types
- Adjustable working depth
- Heavy duty sprung tines
- Suitable for trailing hose system

Sootsmid's arable land injectors come in various working widths, from 325 to 690 centimetres. The arable land injectors are built to be strong and durable and have few wear parts, so the machines have a long service life with low cost of ownership. The frames are fully galvanised, which provides good protection against the harsh conditions under which the arable land injectors are often used. There is a 90 centimetre stubble-clearing space between the front and rear row of tines. This prevents crop residue build-up.

Two or four height-adjustable support wheels ensure the right working depth. A distinguishing feature of Sootsmid arable land injectors is the precise distribution and low-emission application of the slurry. The slurry injectors are fitted with heavy duty sprung tines. The slurry injectors are also fitted with a Sootsmid rotor distributor as standard. The combination of special injection tines and continuous hoses ensures good slurry flow. The sophisticated slurry distribution system prevents growth differences in crops.


Technical specifications

Type		SB 325 Eco	SB 425 Eco	SB 525 Eco	SB 450 Profi	SB 510 Profi	SB 630 Profi	SB 690 Profi
Working width	25	3.25 m	4.25 m	5.25 m	4.25 m	5.25 m	6.25 m	6.75 m
	30	-	4.50 m	5.10 m	4.50 m	5.10 m	6.30 m	6.90 m
Number of tines	25	13	17	21	17	21	25	27
	30	-	15	17	15	17	21	23
Transport width		3.25 m	2.75 m	2.75 m	2.75 m	2.75 m	2.75 m	2.75 m
Transport height		2.30 m	2.30 m	2.65 m	2.41 m	2.85 m	3.35 m	3.60 m
Weight		750 kg	1,200 kg	1,400 kg	1,370 kg	1,610 kg	1,850 kg	2,000 kg



Element

- Tine spacing 25 or 30 centimetres, 2 rows of tines
- High ground clearance
- Heavy duty sprung tines

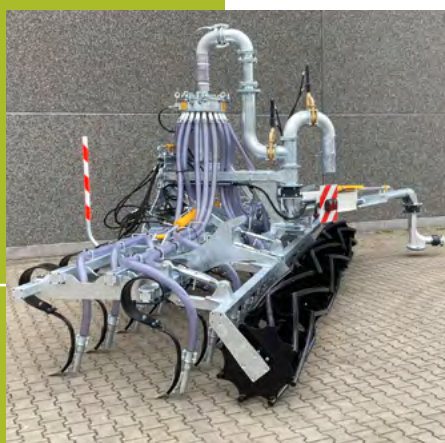

Characteristics

- Hydraulically driven rotor distributor
- Height-adjustable depth wheels
- Complete lighting bar
- Three- or four-point linkage
- Fully galvanised frame
- Clear hose with 50 millimetre steel spiral
- Hydraulic transport lock (not on SB Eco)
- Optionally with pneumatic valves for section shut-off
- Optionally with drag hose, crumbler roller and drag tines (not on SB Eco)